

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

H01L 27/00, 25/065, G02F 1/167, 1/1362

A1

(11) International Publication Number:

WO 00/46854

(43) International Publication Date:

10 August 2000 (10.08.00)

(21) International Application Number:

PCT/US99/30391

(22) International Filing Date:

10 December 1999 (10.12.99)

(30) Priority Data:

60/118,887

5 February 1999 (05.02.99)

US

09/270,146

16 March 1999 (16.03.99)

US

(71) Applicant (for all designated States except US): ALIEN
TECHNOLOGY CORPORATION [US/US]; 2606 Barrington
Court, Hayward, CA 94545 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JACOBSEN, Jeffrey, J.
[US/US]; 501 Tevis Trail, Hollister, CA 95023 (US).
SMITH, John, Stephen [US/US]; 1438 Oxford Street,
Berkeley, CA 94709 (US). HADLEY, Mark, A. [US/US];
39887 Cedar Boulevard, Newark, CA 94560 (US).(74) Agents: SCHELLER, James, C., Jr. et al.; Blakely, Sokoloff,
Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boulevard,
Los Angeles, CA 90025 (US).(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,
US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,
LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM,
AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT,
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: APPARATUSES AND METHODS FOR FORMING ASSEMBLIES

(57) Abstract

Apparatuses and methods for forming displays are claimed. One embodiment of the invention relates to forming a flexible active matrix display along a length of flexible substrate. Another embodiment of the invention relates to forming multiple flexible displays along a continuous flexible substrate. Another embodiment of the invention relates to forming a flexible display along a flexible reflective substrate. Another embodiment of the invention relates to using FSA generally with a flexible web process material. Another embodiment of the invention relates to using FSA and a deterministic method such as "pick and place" to place objects onto a rigid substrate or onto a web process material. Another embodiment of the invention relates to using web processing to deposit and/or pattern display material through an in-line process.

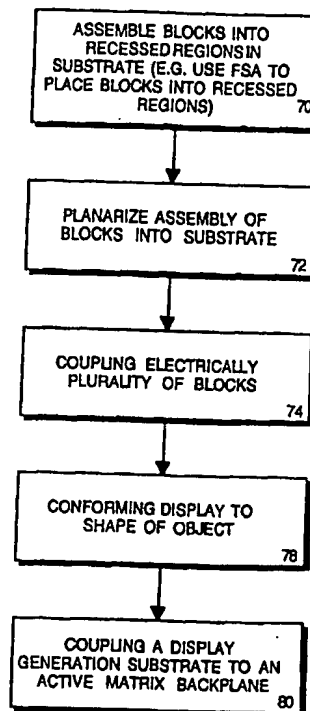

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

APPARATUSES AND METHODS FOR FORMING ASSEMBLIES

This application claims the benefit of the earlier filing date of co-pending provisional application of Jeffrey Jay Jacobsen entitled, "Apparatuses and Methods for Forming Assemblies" filed February 5, 1999, serial no. 60/118,887 and incorporated herein by reference.

BACKGROUND INFORMATION

This application claims the benefit of the earlier filing date of co-pending provisional application of Jeffrey Jay Jacobsen entitled, "*Apparatuses and Methods for Forming Assemblies*," Serial No. 60/118,887, filed February 5, 1999 and incorporated herein by reference.

1. Field of the Invention

The present invention relates generally to the field of fabricating assemblies such as display panels. More particularly, the present invention relates to apparatuses and methods for (1) forming a flexible active matrix display along a length of a flexible substrate; (2) forming multiple displays along a continuous flexible substrate; (3) forming a flexible display along a flexible reflective substrate; (4) using fluidic self-assembly (FSA) generally with a flexible web process material; (5) using FSA and a deterministic method, such as "pick and place," to place objects onto a rigid substrate or onto a web process material; and, (6) using web processing to deposit and/or pattern display material through an in-line process.

2. Description of Related Art

Fabrication of display panels is well known in the art. Display panels may be comprised of active matrix or passive matrix panels. Active matrix panels and passive matrix panels may be either transmissive or reflective. Transmissive displays include polysilicon thin-film transistor (TFT) displays,

-2-

and high-resolution polysilicon displays. Reflective displays typically comprise single crystal silicon integrated circuit substrates that have reflective pixels.

Liquid crystals, electroluminescent (EL) materials, organic light emitting diodes (OLEDs), up and downconverting phosphor (U/DCP), electrophoretic (EP) materials, or light emitting diodes (LEDs) may be used in fabricating flat-panel display panels. Each of these is known in the art and is discussed briefly below.

Liquid crystal displays (LCDs) can have an active-matrix backplane in which thin-film transistors are co-located with LCD pixels. Flat-panel displays employing LCDs generally include five different components or layers: a White or sequential Red, Green, Blue light source, a first polarizing filter, that is mounted on one side of a circuit panel on which the TFTs are arrayed to form pixels, a filter plate containing at least three primary colors arranged into pixels, and a second polarizing filter. A volume between the circuit panel and the filter plate is filled with a liquid crystal material. This material will rotate the polarized light when an electric field is applied between the circuit panel and a transparent ground electrode affixed to the filter plate or a cover glass. Thus, when a particular pixel of the display is turned on, the liquid crystal material rotates polarized light being transmitted through the material so that it will pass through the second polarizing filter. Some liquid crystal materials, however, require no polarizers. Polarizers are made by a company known as SRI. LCDs may also have a passive matrix backplane which is usually two planes of strip electrodes which sandwich the liquid crystal material. However, passive matrices generally provide a lower quality display compared to active matrices. Liquid crystal material includes, but is not limited to, twisted nematic (TN), Super TN, double STN, and ferroelectric. U/DCP and EP displays are formed in a similar fashion except the active medium is different (e.g., upconverting gas, downconverting gas, electrophoretic materials).

-3-

EL displays have one or more pixels that are energized by an alternating current (AC) that must be provided to each pixel by row and column interconnects. EL displays generally provide a low brightness output because passive circuitry for exciting pixel phosphors typically operates at a pixel excitation frequency that is low relative to the luminance decay time of the phosphor material. However, an active matrix reduces the interconnect capacitance allowing the use of high frequency AC in order to obtain more efficient electroluminescence in the pixel phosphor. This results in increased brightness in the display.

LED displays are also used in flat-panel displays. LEDs emit light when energized. OLEDs operate like the LEDs except OLEDs use organic material in the formation of the diode.

Regardless of the type of active medium used, displays are generally comprised of at least a substrate and a backplane. The backplane forms the electrical interconnection of the display and comprises electrodes, capacitors, and transistors in at least some embodiments of a backplane.

Figure 1A illustrates a rigid display device wherein the active matrix display backplane 10 is coupled to a rigid substrate 12. Typically, the active matrix display backplane is also rigid. Figure 1B shows another rigid display. There, the active matrix display backplane 10 is coupled to a rigid substrate 12 (e.g., glass). Also shown is a plurality of blocks 14. These blocks may be fabricated separately and then deposited into holes on substrate 12 by a process known as fluidic self assembly; an example of this process is described in U.S. Patent 5,545,291. These blocks may each contain driver circuitry (e.g., MOSFET and capacitor) for driving a pixel electrode. The active matrix backplane includes transparent pixel electrodes and row/column interconnects (not shown) to electrically interconnect the blocks 14. The plurality of blocks 14 is coupled to the active matrix display backplane 10 and the rigid substrate 12. Figure 1C shows a reflective display 16 coupled to a rigid substrate 12. Figure

-4-

1D shows a reflective display 16 coupled to a rigid substrate 12. A plurality of blocks 14 is coupled to the reflective display 16 and to the rigid substrate 12.

Placing elements, such as pixel drivers, on a rigid substrate is well known. Prior techniques can be generally divided into two types: deterministic methods or random methods. Deterministic methods, such as pick and place, use a human or robot arm to pick each element and place it into its corresponding location in a different substrate. Pick and place methods generally place devices one at a time and are generally not applicable to very small or numerous elements such as those needed for large arrays, such as an active matrix liquid crystal display.

Random placement techniques are more effective and result in high yields if the elements to be placed have the right shape. U.S. Patent No. 5,545,291 describes a method that uses random placement. In this method, microstructures are assembled onto a different substrate through fluid transport. This is sometimes referred to as fluidic self-assembly. Using this technique, various blocks, each containing a functional component, may be fabricated on one substrate and then separated from that substrate and assembled onto a separate rigid substrate through the fluidic self assembly (FSA) process. The blocks which are deposited onto receptor regions of a substrate may include any of a number of different functional components, such as LEDs, pixel drivers, sensors, etc. An example of a particular type of block and its functional component is described in copending US patent application serial number 09/251,220 which was filed Feb. 16, 1999 by the inventor John Stephen Smith and which is entitled "Functionally Symmetric Integrated Circuit Die". This application is hereby incorporated herein by reference.

As noted above, Figures 1B and 1D illustrate a display substrate 12 with blocks 14 formed in the rigid substrate 12. These blocks 14 may be deposited through an FSA process. In the FSA process, a slurry containing the blocks 14 is

-5-

deposited over the rigid substrate 12 and the blocks 14 rest in corresponding openings in the substrate 12.

Figure 2 shows a block 14 and a circuit element 18 on the top surface of block 14. Generally, blocks have a trapezoidal cross-section where the top of the block is wider than the bottom of the block.

Figure 3 shows block 14 in a recessed region of the rigid substrate 12. Between the block and the rigid substrate is an eutectic layer 13. The block has a top surface 18.

Figure 4 shows a planar side view of a rigid substrate coupled to a rigid display backplane with a plurality of blocks between the display backplane 30 and substrate 12. The plurality of blocks are functionally part of the display backplane 30 and are deposited onto receptor regions of the substrate 12. Each block drives at least one transparent pixel electrode. The electrode pixel is fabricated over a transistor which is fabricated in the block.

-6-

Figure 5 shows a portion of an array in an active matrix display backplane. The control line rows 31 and 32 in this device are coupled to gate electrodes along a row and the control line columns 34 and 35 are coupled to data drivers which supply pixel voltages which are applied to the pixel electrodes. A column line 34 is connected to a source electrode of field effect transistor (FET) 36. Another column line 35 is coupled to a source electrode of FET 37. A row line 32 is coupled to the gates of both FETs 36 and 37. The drain of FET 36 is coupled through capacitor 38 to a transparent pixel electrode along the row 32 formed by FETs 36 and 37, and the drain of FET 37 is coupled through a capacitor to another pixel electrode along the row. In one typical example, the backplane may be formed by depositing blocks, using an FSA technique, into a rigid substrate (*e.g.*, glass); each block contains a FET and a capacitor and is interconnected to other blocks by column and row conductors that are deposited onto the rigid substrate; and, the capacitor is coupled to a pixel electrode by another conductor that is deposited onto the rigid substrate. The active medium (*e.g.*, a liquid crystal) is deposited at least on the pixel electrodes which will optically change the active medium's properties in response to the combined voltages or currents produced by the pixel electrodes. The active medium at a given pixel electrode 42 will appear as a square or dot in the overall checkerboard type matrix of the display. The actual size of the FETs and the pixel electrodes 42 are not now drawn to scale, but are shown schematically for the purposes of illustration. **Figure 6** shows pixel electrodes 46 on top of a substrate 48.

There are several disadvantages inherent to the related art. Rigid flat-panel displays are limited in that they are generally coupled to rigid objects. Flexible objects may cause too much stress on rigid flat-panel displays that could affect the electrical interconnections in rigid flat-panel displays.

Another disadvantage to these flat-panel displays is that they are manufactured in a batch operation. Batch operations inherently involve a certain

-7-

amount of down time in production. This increases production time to fabricate display panels. Additionally, flat-panel displays are generally fabricated on rigid substrates that are not continuous in length. This also decreases productivity since the assembly of the flat-panel displays is interrupted until another substrate panel is available to assemble the flat-panel display.

SUMMARY

The present invention provides various apparatuses and methods for creating a display. One aspect of the invention involves creating a flexible active matrix display. Here, a flexible active matrix display is created by coupling an active matrix display backplane to a substrate.

Another aspect of the invention involves a flexible continuous substrate upon which multiple flexible displays are fabricated. Here, a flexible substrate is produced that has a pre-determined thickness and width, but the length of the flexible substrate is continuous (or, at least, continuous relative to a single display). The flexible continuous substrate, along with the display device components, are advanced through a web processing apparatus and separated into individual displays after fabrication. The separated components may be coupled to a mating display component. For example, a separated display component may be coupled to a television or a computer.

Another aspect of the invention relates to a flexible substrate with a reflective display backplane.

Another aspect of the invention relates to moving a flexible substrate through a web process apparatus. A web process apparatus has a plurality of support members that advance the flexible substrate through an in-line process. While the flexible substrate is moving (or while it is temporarily stopped), a slurry that contains a plurality of objects is deposited onto the flexible substrate in a manner similar to an FSA process. These objects slide into receptor regions in the flexible substrate. In one embodiment, the flexible substrate is coupled to

-8-

a display tape that includes a display mechanism. The display tape is a flexible material such as polyether sulfone (PES), polyester terephthalate, polycarbonate, polybutylene terephthalate, polyphenylene sulfide (PPS), polypropylene, polyester, aramid, polyamide-imide (PAI), polyimide, aromatic polyimides, polyetherimide, metallic materials, acrylonitrile butadiene styrene, and polyvinyl chloride. The substrate, such as plastic, advances through the web process apparatus. In one embodiment, as the substrate advances through the web process apparatus, apertures are made into the substrate. Apertures are also made in the display tape as it advances through the web process apparatus. The apertures serve, in one sense, to align the substrate and the display tape. Apertures can also be made in the display tape to allow blocks to couple with the display tape. The final display that is produced from this operation of combining the substrate and the display tape may be organic light-emitting diode, upconverting phosphorus, downconverting phosphorus, electrophoretic liquid crystal, polymer-dispersed liquid crystal, or cholesteric liquid crystal.

Another aspect of the invention relates to an operation that occurs after the FSA has been performed. In order to verify that the FSA process results in complete circuit element block placements, a "pick and place" process is utilized. This allows the blocks to be placed into an empty recessed region onto the substrate that was missed during FSA process. "Pick and place" may occur on a rigid substrate or on a web process material. The substrate is first checked for empty recessed regions. This is done by using an electronic eye viewing the substrate for empty recessed regions. Once an empty recessed region is detected, a robot is used to "pick and place" an object into an empty recessed region of the substrate.

Another aspect of the invention relates to web processing wherein display material (e.g., display material that provides a display mechanism such as an upconverting phosphorus) is deposited or patterned through an in-line process during the fabrication of displays. This method involves a flexible substrate

-9-

wherein display material is placed onto the flexible substrate. This process is repeated for each display that is manufactured. The flexible substrate, which may be considered a display tape, is then coupled to a backplane that is on a separate substrate.

In one embodiment, the substrate has apertures that are added through a laser, punch press, template, or other operation. While the substrate is advanced through the in-line process, the FSA process is applied to the substrate. This allows the blocks to drop into the plurality of recessed regions in the substrate. The substrate is then advanced to the next operation wherein an interconnect is deposited. The substrate is then coupled to the display tape (either separating the sections of displays or before separating the displays from the tape).

While an array of components (*e.g.*, display components) for an assembly have been described as examples of the invention, an array of other assemblies such as x-ray detectors, radar detectors, micro-electro-mechanical structural elements (MEMS) or, generally, an assembly of sensors or actuators or an assembly of circuit elements also may be produced using the claimed invention. Thus, for example, flexible antennas, other sensors, detectors, or an array of circuit elements may be fabricated using one of the embodiments of the inventions. Other aspects and methods of the present invention as well as apparatuses formed using these methods are described further below in conjunction with the following figures.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example. The invention is not limited to the figures of the accompanying drawings in which like references indicate similar elements.

Figure 1A shows a planar side view of an active matrix display backplane coupled to a rigid substrate.

-10-

Figure 1B shows a planar side view of an active matrix display backplane coupled to a rigid substrate wherein a plurality of blocks are part of the active matrix display.

Figure 1C shows a planar side view of a reflective display backplane coupled to a rigid substrate.

Figure 1D shows a planar side view of a reflective display backplane coupled to a rigid substrate wherein a plurality of blocks are coupled to the reflective display and to the rigid substrate.

Figure 2 shows a top perspective view of a circuit element block.

Figure 3 shows a planar side view of blocks in recessed regions of the rigid substrate and a metalization surface on the blocks.

Figure 4 shows a planar side view of a rigid substrate coupled to a rigid display backplane with a plurality of blocks between the display backplane and substrate.

Figure 5 schematically represents a portion of an array of an active matrix backplane.

Figure 6 shows a top view of a plurality of pixel electrodes in a backplane.

Figure 7A shows a planar side view of a flexible display device wherein an active matrix display backplane is coupled to a flexible substrate.

Figure 7B shows a planar side view of a flexible display device wherein an active matrix display backplane is formed on a flexible substrate wherein a plurality of blocks are formed on the flexible substrate and flexible interconnect layers and pixel electrodes are deposited onto the flexible substrate.

-11-

Figure 7C shows a top view of a flexible display device comprising an active matrix display backplane coupled to a flexible substrate wherein the flexible display device is coupled to an object.

Figure 8A shows a top view of an active matrix display backplane.

Figure 8B shows the top view of a passive matrix display backplane

Figure 8C shows the top layer of a passive matrix display backplane.

Figure 8D shows a bottom layer of a passive matrix display backplane.

Figure 9 shows a flow chart of the method of assembling a flexible display along the length of a flexible substrate.

Figure 10 shows a flow chart of the method of manufacturing multiple flexible displays along a flexible substrate.

Figure 11 shows a top view of a flexible substrate with multiple display components fabricated thereon.

Figure 12A shows a top view of a display component that has a passive matrix display backplane attached thereto.

Figure 12B shows a top view of a display component that has an active matrix display backplane attached thereto.

Figure 13 shows a top view of flexible substrate attached to a display backplane.

Figure 14A shows a planar side view of a backplane interconnect layer coupled to a flexible substrate.

-12-

Figure 14B shows a planar side view of a backplane interconnect layer coupled to a flexible substrate wherein blocks are coupled to the backplane interconnect layer and to the flexible substrate.

Figure 14C shows a planar side view of a flexible reflective display coupled to a flexible substrate that has holes or recesses to accept blocks.

Figure 15A shows a flow chart of a method of fabricating a display device wherein a flexible substrate and a display tape undergo processing and are subsequently coupled.

Figure 15B shows schematically a method of fabricating a display device wherein a flexible substrate and a display tape undergo processing and are subsequently coupled.

Figure 16 shows a flow chart of a method of the picking and placing objects onto a flexible substrate after the FSA process has been applied to the substrate.

Figure 17 shows a flow chart that relates to the FSA process and the coupling of the display material to the substrate.

Figure 18 shows a top view of a flexible continuous substrate wherein displays of different sizes are created.

Figure 19 shows a top view of a flexible continuous substrate wherein displays of similar size are created.

Figure 20 shows a planar side view of the recessed regions in the substrate.

Figure 21 shows an embodiment of the overall in-line process of the invention.

-13-

Figure 22 shows a top view of display material being placed through a screen onto display tape.

Figure 23 shows a top view of display material being laser etched onto display tape.

Figure 24 shows a top view of display material wherein lithography is used to pattern the display material.

Figure 25 shows a top view of display material that is deposited in a pattern onto display tape.

Figure 26A shows a planar side view of a substrate.

Figure 26B shows openings or receptor regions created and blocks deposited into the substrate.

Figure 26C shows deposition of planarization material and openings being created into the substrate.

Figure 26D shows deposition of interconnect and pattern interconnect.

DETAILED DESCRIPTION

The present invention relates to apparatuses and methods for forming displays. The following description and drawings are illustrative of the invention and are not to be construed as limiting the invention.

One embodiment in accordance with the invention includes a flexible active matrix display panel coupled to a substrate. By fabricating an active matrix display device that is flexible, the active matrix display panel can be fitted to an object that is either rigid or flexible and that has a non-planar surface. Other embodiments of the invention include a method of making a flexible continuous substrate upon which multiple flexible displays are fabricated. The multiple flexible displays may be of similar or different sizes. These displays are

-14-

separated from one another as the substrate is advanced through the web processing apparatus. The backplane of the display may be comprised of a plurality of blocks wherein each block has a circuit element thereon. The blocks are contained in a slurry that is deposited onto the flexible substrate. Although blocks may be comprised of single crystal silicon or other like material which makes the block rigid, the substrate may still be flexible because the size of these blocks (50 x 100 microns or 100 x 100 microns) is small in comparison to the flexible substrate. These blocks may also have recessed regions wherein another micro-electro-mechanical structural element may be deposited thereon. The flexible substrate forms part of a display backplane. The flexible displays may be either an active matrix or a passive matrix displays.

Another embodiment of the invention relates to a flexible substrate with a reflective display backplane.

Another embodiment of the invention involves using FSA generally with a flexible web processed material. Incorporated by reference is United States Patent No. 5,545,291 explaining how to assemble microstructures onto a substrate. With embodiments of the invention, a flexible substrate is advanced through a web process apparatus. The FSA with a plurality of blocks (or other functional elements) is deposited onto the flexible substrate wherein the blocks fall into recessed regions found in the flexible substrate. The substrate is then advanced to a further point in the process wherein an interconnect layer is deposited onto the substrate. While the substrate is advanced, a display tape is advanced to a point wherein the flexible substrate becomes coupled to the display tape.

Before the coupling takes place, a metal interconnect is placed onto the backplane. A display material is then deposited onto the display tape. The display material may be cholesteric liquid crystal, polymer-dispersed liquid crystal or other type of material. The display material is layered or patterned on the display tape. The display tape is then advanced to a point wherein the metal

-15-

interconnect is deposited or etched on the display material. This is done by using laser etch, ink jet, screen print, deposit, or lithography and etch. After this point, the display tape may be laser cut, punched, sealed, or trimmed. Coupling takes place at a point further along in the process.

Another embodiment of the invention relates to the FSA process wherein, after the blocks are deposited on the substrate, they fall into recessed regions found in the substrate. After a certain time period, the substrate is checked for any existing empty recessed regions. Finding empty recessed regions is accomplished by using an electronic eye attached to a machine that is able to view the surface of the substrate. A robot or a person is used to place an object on an empty recessed region.

Another embodiment of the invention relates to FSA being applied to a substrate that has a first receptor region and a second receptor region. These regions may be of similar or different sizes. The objects that are contained in the slurry drop into the respective receptor regions that most closely match the size of the object.

A continuous process as in the invention offers the advantage of increasing the number of flat-panel displays produced, thereby reducing the cost of manufacturing the displays. FSA in conjunction with a deterministic method of placing blocks (*e.g.*, "pick and place") with circuit elements of objects onto a rigid substrate or a web process material is disclosed. In this aspect of the invention, the recessed regions of the substrate are checked for empty regions. If there is an empty recessed region in the substrate, an object is robotically placed into the empty recessed region. The advantage offered by robotically placing an object into an empty recessed region of a substrate is that it increases the overall effectiveness and the quality of the displays.

In the following description, numerous specific details such as specific materials, processing parameters, processing steps, *etc.*, are set forth in order to

-16-

provide a thorough understanding of the invention. One skilled in the art will recognize that these details need not be specifically adhered to in order to practice the claimed invention. In other instances, well known processing steps, materials, *etc.* are not set forth in order not to obscure the invention.

Figure 6 shows pixel electrodes 46 on top of a substrate 48.

Figure 7A shows a flexible display device, one embodiment of the invention. Here, an active matrix display backplane is coupled to a flexible substrate 52. The active matrix may include pixel electrodes and spatial light modulars. **Figure 7B** shows a flexible display device wherein the active matrix display backplane 50 is coupled to a flexible substrate 52. Bistable crystal may be used in conjunction with the flexible substrate 52. A display of this type may be used in credit cards or some other type of card that has flexibility. Blocks 54 are deposited onto the flexible substrate and are part of the active matrix display backplane. The block 54 comprises an active circuit element (not shown) that drives a picture element (not shown). **Figure 7C** shows the top view of a flexible display device wherein an active matrix display backplane 50 is coupled to a flexible substrate 52. The flexible display device is coupled to an object 56. The flexible display device conforms to the shape of the object 56.

Figure 8A shows an active matrix display backplane 60. The plurality of blocks in the active matrix display backplane contain the active circuit element. This display backplane is flexible. **Figure 8B** shows a passive matrix display backplane 62. This display backplane is flexible. **Figure 8C** shows the top layer of a passive matrix backplane. **Figure 8D** shows the bottom layer of a passive matrix backplane.

Figure 9 shows one method of assembling a flexible display along the length of a flexible substrate 70 in accordance with an embodiment of the invention. First, blocks are assembled into the openings of the flexible substrate. Utilizing an FSA process, a plurality of blocks are deposited in a slurry that go into the recessed regions of the flexible substrate. Planarization of the assembly

-17-

of blocks into substrate 72 is the next step. Planarization takes place by depositing a material that may be spun to flatten or may be subjected to conventional chemical-mechanical polishing. Then, the electrical coupling of the plurality of blocks takes place at step 74 by opening holes in the planarization layer and depositing metalization material or other conductive materials into the holes and beyond the holes to form an interconnect (*e.g.*, a row or column interconnect). The interconnect between the rows and columns is comprised of flexible and conductive material. For example, the interconnect could be made of conductive polymers, metals (*e.g.*, aluminum, copper, silver, gold, *etc.*), metal particles, conductive organic compounds, or conductive oxides. The display is made to conform the object's shape 78. It should be noted that the operations for forming the display may be done in a different order than that found in **Figure 9** and thus the operation 78 may be performed after operation 80. A display generation substrate (*e.g.*, a PDLC layer) is coupled to the active matrix backplane 80.

Figure 10 shows a method of manufacturing multiple displays along a flexible substrate. Multiple display components are created on a flexible substrate 200. The flexible substrate is advanced to a second region on the substrate 202. A new display component is created on the flexible substrate in a different region of the substrate 204 by advancing the flexible substrate through a web processing of apparatus 206 and coupling a display material to the substrate 208. Separation of the display panel occurs at the end of the process 210.

Figure 11 shows a flexible substrate with multiple display components. The flexible substrate 220 has display component 222 and display component 224 attached thereto. The substrate has three lengths: a first length 226, a second length 228, and a third length 230. Display components 222 and 224 are active matrix display devices.

-18-

Figure 12A shows display component 222 that has a passive matrix display backplane attached thereto. **Figure 12B** shows a display component 224 that has an active matrix display backplane attached thereto.

Figure 13 shows a flexible substrate 50 attached to a display backplane.

Figure 14A shows a reflective display backplane 48 coupled to a flexible substrate 46. **Figure 14B** shows a flexible reflective display backplane 48 coupled to a substrate 46. Blocks 14 are coupled to the flexible substrate 46 and to the flexible reflective display backplane 48. The reflective display backplane includes an interconnect layer 45. This interconnect layer 45 typically is comprised of metallic material. Coupled to the flexible substrate is a flexible reflector 48. **Figure 14C** shows a flexible reflective display wherein recessed region 45 contains reflective material 44. The substrate 46 is coupled to the reflective display backplane 48.

Figure 15A shows a method of fabricating a display device wherein a flexible substrate and a display tape undergo processing and are subsequently coupled. There, the flexible substrate is advanced along a process line 500. A slurry containing a plurality of blocks is dispensed onto the flexible substrate 502. A second slurry containing a plurality of blocks is again dispensed onto the substrate. Excess slurry is collected in a container and is recycled. The blocks fall into recessed regions in the substrate. Adhesives and spacers are deposited onto the substrate 504. Display material is placed onto the substrate 508. This material may comprise polymer-dispersed liquid crystal, cholesteric liquid crystal, electrophoretic liquid crystal, upconverting phosphor, or downconverting phosphor 512.

Figure 15B shows the overall process of fabricating a display device wherein a flexible substrate 120 and a display tape 160 undergo processing and are subsequently coupled. There, the flexible substrate is advanced along a first process line and advances through a first set of support members 122. A first

-19-

slurry 124 containing a plurality of blocks is dispensed onto the flexible substrate. A second slurry 126 containing a plurality of blocks is again dispensed onto the substrate. Excess slurry is collected in a container 128 and is recycled. The blocks fall into recessed regions in the substrate. It should be noted that a polarizing or retarding film could be deposited onto the substrate before the FSA process is applied to the substrate. Flexible substrate 120 is advanced through a second set of support members 130. An interconnect 132 is then deposited onto flexible substrate 120. The flexible substrate is then advanced to point 134. In conjunction with this process, display tape 160 undergoes a separate process. Display material is placed onto at least one side of the display tape 160. Display tape 160 is advanced through a first set of support members 164. The display material is patterned or layered 168. This display material may comprise polymer-dispersed liquid crystal, cholesteric liquid crystal, electrophoretic liquid crystal, upconverting phosphor, or downconverting phosphor. Display tape 160 is advanced through a second set of support members 170. An interconnect 172 is either deposited or etched onto the display tape 160. The display tape is then advanced to point 134 where the display tape is coupled to the substrate. A conveyor belt 174 surrounds the support members.

While the process may follow these steps, it should be noted that it is also possible that one portion of the display will be singulated prior to the display tape being attached to the substrate.

Figure 16 relates to a method of picking and placing of objects onto a flexible substrate after the FSA process has been applied to the substrate. A slurry containing a plurality of objects is dispensed onto the substrate 90. The objects fall into recessed regions in the substrate. The excess slurry is collected and recycled 91. The substrate is checked for empty recessed regions 92. This checking is performed by an electronic eye that views the substrate. Objects are robotically placed into empty regions found in substrate 94. A metalization

-20-

material is placed onto at least one of the substrate's surfaces and is patterned or etched 96. The display tape is coupled to the substrate 98.

Figure 17 relates to the FSA process and the coupling of the display material with the substrate. First, a slurry containing a plurality of blocks is deposited onto the substrate 400. If the recessed regions are of equivalent size, step 450 is then followed. If not, a first slurry with a first plurality of objects is deposited onto the substrate 410. Excess slurry is caught and recycled 415. Once this step is performed, a second slurry with a second plurality of objects is placed onto the substrate 420. Excess second slurry is recycled into a second container 425. A metal interconnect is then deposited onto the substrate 435. After these steps, a display material is deposited onto the substrate 430.

Figure 18 shows a flexible continuous substrate wherein two displays are created. Display device 52 is larger than display device 50. This shows that multiple displays of different sizes can be created on the substrate through an in-line process. Alternatively, **Figure 19** shows displays 54 and 56 of similar size.

In addition to multiple displays being able to be made different sizes, the substrate itself may have different sized recessed regions. This allows the substrate to receive various sized blocks or devices. **Figure 20** shows a cross-sectional view of the recessed regions in the substrate. Recessed region 65 is smaller than recessed region 67.

Figure 21 shows an embodiment of the overall in-line process of the invention. A web apparatus machine 119 is used to process the substrate. At step 120, apertures are created in the flexible substrate. These apertures can be created by a number of methods. For example, the apertures can be punched into the substrate. Another method involves using a template to create the apertures. A laser, chemical or plasma etching could also be used to create the apertures. The substrate advances over a plurality of support members 122. The substrate goes in between support members 123 and 123B. The FSA process is applied to

-21-

the substrate. FSA comprises a slurry that contains a plurality of functional blocks. These blocks have, in one embodiment, a circuit element (not shown) that drives the picture element (not shown). The FSA process occurs at block 124. It is then applied again at 126. The excess slurry is collected in container 128. Then, the flexible substrate advances through support members 130. The flexible substrate then has an interconnect 131 deposited on the top of the flexible substrate 132. The resulting flexible substrate advances over a guide member and meets at a point 134 wherein it is coupled to a display tape that in one embodiment is a flexible substrate that includes separate regions each having a display material on this flexible substrate. A different portion of the process involves the display tape 160. Before the display tape is coupled with the substrate, the display tape goes through its own separate process that is described below.

The display tape has display material 162 deposited on at least one side of the display tape. There are a variety of ways that display material may be deposited onto the display tape. For example, display material may be sprayed onto the display tape. The display material also may be placed on a screen over the display tape. Another method is to place the display tape into a container that holds the display material. The display tape advances through support members 164. The display tape then has display material layered or patterned on the display tape at 168. This display tape then advances through another plurality of support members 170. A large area metal interconnect is then deposited or etched onto the display tape 172. This may be performed by inkjet, lithography and etch, screen print, laser etch, or deposit 174. In one embodiment of the invention, this large interconnect is a cover glass electrode. At point 134, the display tape is coupled with a substrate.

Figure 22 shows a display material being placed through a screen 180 onto display tape 168. The screen 180 has a desired pattern created by holes that

-22- .

go through the screen 180. This desired pattern may be dictated by a customer or by the manufacturer.

Another method of placing display material onto the display tape is shown in **Figure 23**. **Figure 23** shows a top view of display material being laser etched onto display tape 168. The etching occurs when the high intensity light from the laser 182 strikes the display material on top of the display tape 168. A pattern is created in the display material by the laser 182.

Another method of depositing display material is shown in **Figure 24**. **Figure 24** shows lithography being used to pattern the display material. Lithography involves using a block 183 with a pattern engraved in the bottom surface of the block 183. The bottom surface of the block 183 contacts the display material.

Figure 25 shows yet another method of depositing display material onto the display tape. There display material is deposited in a pattern onto the display tape 168. The display material is deposited by a container 183 that contains the display material. The container 183 is placed over the display tape 168. The display material drops onto the display tape 168 in a pattern.

Figures 26A-26D shows generally the process of planarization material being added onto the substrate. **Figure 26A** shows a planar side view of a substrate 190. **Figure 26B** shows openings or receptor regions 192 created and blocks deposited into the substrate. **Figure 26C** shows deposition of planarization material 194 and openings being created into the substrate. **Figure 26D** shows deposition of interconnect 198 and pattern interconnect.

While an array of components (*e.g.* display components) for an assembly have been described as examples of the invention, an array of other assemblies such as x-ray detectors, radar detectors, micro-electro-mechanical structural elements (MEMS) or, generally, an assembly of sensors or actuators or an assembly of circuit elements also may be produced using the claimed invention.

-23-

Thus, for example, flexible antennas, other sensors, detectors, or an array of circuit elements may be fabricated using one of the embodiments of the inventions. Other aspects and methods of the present invention as well as apparatuses formed using these methods are described further below in conjunction with the following figures.

Listed below are related U.S. Patent Applications that describe various improvements to the methods and devices of the invention described herein. These patent applications are incorporated by reference. Additionally, a U. S. Patent is also incorporated by reference.

Co-pending U.S. Patent Application Serial No. _____, entitled "*Methods for Transferring Elements From A Template To A Substrate*" (Docket No. 003424.P009), filed by Jeffrey J. Jacobsen, Mark A. Hadley, and John Stephen Smith and assigned to the same Assignee of the present invention, describe an FSA on a template with transfer to another substrate. These co-pending applications are hereby incorporated herein by reference.

Co-pending U.S. Patent Application Serial No. _____, entitled "*Methods and Apparatuses for Fabricating A Multiple Module Assembly*" (Docket No. 003424.P010), filed by Jeffrey J. Jacobsen, Glenn Wilhelm Gengel, and Gordon S.W. Craig and assigned to the same Assignee as the present invention, describes an electronic modular assembly. This co-pending application is hereby incorporated herein by reference.

Co-pending U.S. Patent Application Serial No. _____, entitled "*Apparatuses and Methods Used in Forming Electronic Assemblies*" (Docket No. 003424.P011), filed by Jeffrey J. Jacobsen, Glenn Wilhelm Gengel, and John Stephen Smith and assigned to the same Assignee as the present invention, describes a method of molding substances. This co-pending application is hereby incorporated herein by reference.

-24-

Co-pending U.S. Patent Application Serial No. _____, entitled "*Web Process Interconnect in Electronic Assemblies*" (Docket No. 003424.P012), filed by Jeffrey J. Jacobsen, Glenn Wilhelm Gengel, Mark A. Hadley, Gordon S.W. Craig, and John Stephen Smith and assigned to the same Assignee as the present invention, describes a method of creating various interconnects on a web tape. This co-pending application is hereby incorporated herein by reference.

Co-pending U.S. Patent Application Serial No. _____, entitled "*Apparatuses and Methods for Forming Assemblies*" (Docket No. 003424.P016), filed by Jeffrey J. Jacobsen and assigned to the same Assignee as the present invention, describes a method of rolling blocks into their recessed regions. This co-pending application is hereby incorporated herein by reference.

Patent No. 5,545,291 entitled "*Method for Fabricating Self-Assembling Microstructures*," filed by John S. Smith and Hsi-Jen J. Yeh, issued August 13, 1996.

In the preceding detailed description, the invention is described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

-25-

CLAIMS:

What is claimed is:

1. A flexible display device comprising:
a substrate; and
an active matrix display backplane coupled to said substrate.
2. The flexible display device as in claim 1 wherein said active matrix display backplane comprises a plurality of blocks that are deposited onto said substrate.
3. The flexible display device as in claim 1 wherein said active matrix display backplane comprises a plurality of blocks that are deposited onto a polarizing film.
4. The flexible display device as in claim 2 wherein said display device conforms to a desired shape of an object which is planar when said flexible display device is attached to said object.
5. The flexible display device as in claim 2 wherein said display device conforms to a desired shape of an object which is non-planar when said flexible display device is attached to said object.
6. The flexible display device as in claim 2 wherein each of said blocks comprises an active circuit element which drives a picture element.
7. The flexible display device as in claim 2 further comprising:
a display generation substrate coupled to said active matrix backplane.
8. The flexible display device as in claim 1 wherein said active matrix backplane comprises at least one electrode for each picture element.
9. The flexible display device as in claim 1 wherein said active matrix display is conformal.

-26-

10. The flexible display device as in claim 1 wherein the substrate is flexible.
11. A method of manufacturing a flexible active matrix display panel comprising:
 - depositing a plurality of shaped blocks onto a flexible substrate, each said block has a pixel electrode thereon; and
 - coupling electrically said plurality of blocks to form an active matrix backplane.
12. The method as in claim 11 wherein said display panel conforms to a desired shape of an object when said flexible display panel is attached to said object.
13. The method as in claim 11 wherein each of said shaped blocks comprises an active circuit element which drives a picture element.
14. The method as in claim 11 further comprising:
 - a display generation substrate coupled to said active matrix backplane.
15. The method as in claim 11 wherein said active matrix display backplane comprises at least one electrode for each picture element.
16. The method as in claim 11 wherein said active matrix display is conformal.
17. The method as in claim 11 wherein the flexible active matrix display panel comprises a single crystal silicon transmissive display.
18. The method as in claim 11 wherein the flexible active matrix display panel comprises a reflective display.
19. The method as in claim 11 wherein the flexible active matrix display panel comprises an organic light emitting diode.

-27-

20. The method as in claim 11 wherein the flexible active matrix display panel comprises an inorganic light emitting diode.
21. The method as in claim 11 wherein the flexible active matrix display panel comprises upconverting phosphor.
22. The method as in claim 11 wherein the flexible active matrix display panel comprises downconverting phosphor.
23. A flexible display device comprising:
 - a substrate;
 - a passive matrix display backplane coupled to said substrate; and
 - said passive matrix display backplane comprises a plurality of blocks that are deposited onto said substrate.
24. The flexible display device as in claim 23 wherein said display device conforms to a desired shape of an object which is planar when said flexible display device is attached to said object.
25. The flexible display device as in claim 23 wherein said display device conforms to a desired shape of an object which is non-planar when said flexible display device is attached to said object.
26. The flexible display device as in claim 23 wherein each of said blocks comprises a circuit element which drives a picture element.
27. The flexible display device as in claim 23 further comprising:
 - a display generation substrate coupled to said passive matrix backplane.
28. The flexible display device as in claim 22 wherein said passive matrix backplane has a picture element.
29. The flexible display device as in claim 22 wherein said passive matrix display is conformal.

-28-

30. The flexible display device as in claim 22 wherein the substrate is flexible.
31. A method of manufacturing a flexible passive matrix display panel comprising:
depositing a plurality of shaped blocks onto a flexible substrate; and
coupling electrically said plurality of blocks to form a passive matrix backplane.
32. The method as in claim 31 wherein said display panel conforms to a desired shape of an object when said flexible display panel is attached to said object.
33. The method as in claim 31 wherein each of said shaped blocks comprises a passive circuit element which drives a picture element.
34. The method as in claim 31 further comprising:
a display generation substrate coupled to said passive matrix backplane.
35. The method as in claim 31 wherein said passive matrix display backplane has a picture element.
36. The method as in claim 31 wherein said passive matrix display is conformal.
37. The method as in claim 31 wherein the flexible passive matrix display panel comprises a single crystal silicon transmissive display.
38. The method as in claim 31 wherein the flexible active matrix display panel comprises a single crystal silicon reflective display.
39. The method as in claim 31 wherein the flexible passive matrix display panel comprises an organic light emitting diode.

-29-

40. The method as in claim 31 wherein the flexible active matrix display panel comprises an inorganic light emitting diode.
41. The method as in claim 31 wherein the flexible passive matrix display panel comprises upconverting phosphor.
42. The method as in claim 31 wherein the flexible passive matrix display panel comprises downconverting phosphor.
43. A plurality of display device components comprising:
a flexible substrate having at least a first length;
said flexible substrate having a second length; and
a plurality of display device components coupled to said flexible substrate, each of said display device components is separated by at least a third length.
44. The plurality of display device components as in claim 43 wherein each of said display device components is assembled into a separate display device.
45. The plurality of display device components as in claim 43 wherein each of said flexible display device components has a backplane comprising a plurality of shaped blocks which are deposited onto said flexible substrate.
46. The plurality of display device components as in claim 44 wherein said separate display device components conform to a desired shape of an object which is non-planar when said separate display device is attached to said object.
47. The plurality of display device components as in claim 45 wherein each of said shaped blocks comprises a circuit element which drives a picture element.

-30-

48. The plurality of display device components as in claim 44 wherein each of said display device components forms a separate display backplane and a display generation substrate is coupled to each said separate display backplane.

49. The display device as in claim 48 wherein each said separate display backplane comprises at least one electrode for each picture element.

50. The display device as in claim 48 wherein each said display separate display backplane is a passive matrix display backplane.

51. The display device as in claim 48 wherein each said display backplane is an active matrix display backplane.

52. The display device as in claim 43 wherein the second length of the substrate is continuous.

53. A method of manufacturing a plurality of display panels on a flexible substrate, said method comprising:

creating a first display component on a first region of a flexible substrate, said flexible substrate having a first length and a second length;

creating a second display component on a second region of said flexible substrate, said second region being disposed along at least one of said first length and said second length from said first region by a third length, and wherein said first region is for a first display panel of said plurality of display panels and said second region is for a second display panel of said plurality of display panels.

54. The method as in claim 53 further comprising:
rolling said flexible substrate through a web processing apparatus.

55. A display device comprising:
a flexible substrate; and
a flexible reflective display backplane coupled to said flexible substrate.

-31-

56. The display device as in claim 55 wherein said flexible reflective display backplane comprises a plurality of shaped blocks which are deposited onto said flexible substrate.

57. The display device as in claim 56 wherein said display device conforms to a desired shape of an object when said flexible display device is attached to said object.

58. The flexible display device as in claim 56 wherein each of said shaped blocks comprises a circuit element which drives a picture element.

59. The display device as in claim 56 further comprising:
a display generation substrate coupled to said flexible reflective display backplane.

60. The display device as in claim 55 wherein said flexible reflective display backplane comprises at least one electrode for each picture element.

61. The display device as in claim 55 wherein said display is conformal.

62. The display device as in claim 55 wherein said substrate has at least one recessed region, said recessed region is reflective.

63. A method of processing a flexible substrate, said method comprising:
moving a flexible substrate through at least one web process apparatus;
dispensing a slurry containing a plurality of shaped objects onto said flexible substrate, said shaped objects being deposited onto receptor regions of said flexible substrate.

64. The method as in claim 63 wherein said flexible substrate moves at a rate of 5 inches per minute to 100 inches per minute.

-32-

65. The method as in claim 63 wherein a display tape moves at a rate of 5 inches per minute to 100 inches per minute.

66. The method as in claim 65 wherein the display tape comprises a material selected from the group of polyether sulfone (PES), polyethylene terephthalate, polycarbonate, polybutylene terephthalate, polyphenylene sulfide (PPS), polypropylene, polyester, aramid, polyamide-imide (PAI), polyimide, aromatic polyimides, polyetherimide, metallic materials, acrylonitrile butadiene styrene, and polyvinyl chloride.

67. A device for continuously feeding a flexible substrate and a display tape through a production line to form a display panel comprising:

- a first drive belt disposed on a first plurality of support members to traverse a flexible substrate about a stationary point;
- a second drive belt disposed on a second plurality of support members to traverse a display tape about the stationary point;
- said flexible substrate disposed on a first drive belt wherein the flexible substrate has apertures;
- a display tape deposited on the second drive belt wherein the display tape has apertures;
- a slurry comprising a plurality of shaped blocks is placed onto the substrate;
- a container stores excess slurry;
- the first drive belt has adjustable fasteners corresponding to the apertures of the flexible substrate;
- the second drive belt has adjustable fasteners corresponding to the apertures of the display tape; and
- the flexible substrate is coupled to the display tape.

68. The device of claim 67 wherein the flexible substrate is comprised of the material selected from the group consisting of glass, plastic, and silicon.

-33-

69. The device of claim 67 wherein the display tape is comprised of the material selected from the group consisting of polyether sulfone (PES), polyester terephthalate, polycarbonate, polybutylene terephthalate, polyphenylene sulfide (PPS), polypropylene, polyester, aramid, polyamide-imide (PAI), polyimide, aromatic polyimides, polyetherimide, metallic materials, acrylonitrile butadiene styrene, and polyvinyl chloride.

70. The device of claim 67 wherein said apertures of the substrate are about evenly spaced.

71. The device of claim 67 wherein said apertures of the display tape are about evenly spaced.

72. The device of claim 63 wherein the display tape has a top surface and a bottom surface and at least one of the top surface and bottom surface has a metalization film.

73. The device of claim 67 wherein the display tape is heated.

74. The device of claim 63 wherein the display tape is patterned.

75. A method for continuously feeding a flexible substrate and a display tape through a production line to form a display panel comprising:
moving a flexible substrate and a display tape;
placing a slurry onto said flexible substrate said slurry having a plurality of shaped blocks which are designed to be received by receiving regions of said flexible substrate;

coupling said flexible substrate to said display tape;

coupling said flexible substrate to a backplane;

said display tape comprises the material selected from the group of polyether sulfone (PES), polyester terephthalate, polycarbonate, polybutylene terephthalate, polyphenylene sulfide (PPS), polypropylene, polyester, aramid,

-34-

polyamide-imide (PAI), polyimide, aromatic polyimides, polyetherimide, metallic materials, acrylonitrile butadiene styrene, and polyvinyl chloride.

76. The method as in claim 75 wherein said display tape is flexible.
77. The method as in claim 75 wherein the display comprises an organic light emitting diode.
78. The method as in claim 75 wherein the display comprises a light emitting diode.
79. The method as in claim 75 wherein the display comprises an inorganic light emitting diode.
80. The method as in claim 75 wherein the display comprises an organic light emitting diode.
81. The method as in claim 75 wherein the display comprises cholesteric liquid crystal.
82. The method as in claim 75 wherein the display comprises upconverting phosphorus.
83. The method as in claim 75 wherein the display comprises downconverting phosphorus.
84. The method as in claim 75 wherein the display comprises electrophoretic material.
85. The method as in claim 75 wherein the display comprises liquid crystal.
86. The method as in claim 75 wherein the display comprises a polymer-dispersed liquid crystal.

-35-

87. A method of selectively placing an object onto a region of a substrate that forms a portion of a display panel, said method comprising:

dispensing a slurry containing a plurality of shaped objects onto a substrate, said shaped objects being deposited into recessed regions of the substrate;

checking for empty recessed regions in the substrate;

placing robotically an object into an empty recessed region of the substrate.

88. The method as in claim 87 further comprising coupling a display material to said substrate.

89. The method as in claim 87 wherein said substrate is rigid.

90. The method as in claim 87 wherein said substrate is flexible.

91. The method as in claim 87 wherein recessed regions are about a first size and about second size.

92. The method as in claim 91 wherein an object of about a first size is dispensed in a slurry onto the substrate, said at least one object is received into a region with a first size.

93. The method as in claim 92 wherein an object about the size of the region with a second size is dispensed in a slurry onto the substrate, said object is received into a region with a second size.

-36-

94. A method of placing objects onto a substrate, said method comprising:

dispensing a slurry containing a plurality of shaped objects onto a substrate, said shaped objects being deposited onto a first receptor region of said substrate;

grasping at least one object with a robotic arm and depositing said one object onto a second receptor region of said substrate.

95. The method as in claim 94 wherein said first receptor region is different in size than said second receptor region and both are recessed regions in said substrate.

96. The method as in claim 95 wherein said one object is different in size than each of said shaped objects.

97. The method as in claim 94 wherein said substrate is rigid.

98. The method as in claim 94 wherein said substrate is flexible and is processed through support members in a web process.

99. The method as in claim 94 wherein the first receptor region of said substrate is the equivalent size to the second receptor region of said substrate.

100. A method of depositing a display material through an in-line process on a flexible substrate to form a plurality of display panels, comprising the steps of:

depositing a display material onto the flexible substrate in a first region of the flexible substrate; and

depositing said display material on the flexible substrate in a second region of the flexible substrate, wherein said first region is for a first display panel and said second region is for a second display panel or another portion of said first display panel.

-37-

101. The method as in claim 100 wherein a backplane is coupled to the flexible substrate.
102. The method as in claim 100 wherein the backplane is flexible.
103. The method as in claim 100 wherein the display comprises a liquid crystal material.
104. The method as in claim 100 wherein the display material comprises an upconverting phosphorus.
105. The method as in claim 100 wherein the display material comprises a polymer-dispersed liquid crystal.
106. The method as in claim 100 wherein the display material comprises cholesteric liquid crystal.
107. The method as in claim 100 wherein the patterning of the display material is by laser etching.
108. The method as in claim 100 wherein the patterning of the display material is by an ink jet.
109. The method as in claim 100 wherein the patterning of the display material is by screen printing.
110. The method as in claim 100 wherein the patterning of the display material is by deposition.
111. The method as in claim 100 wherein the patterning of the display material is by lithography and etching.
112. The method as in claim 100 wherein a metal interconnect is deposited onto the first region of the substrate.

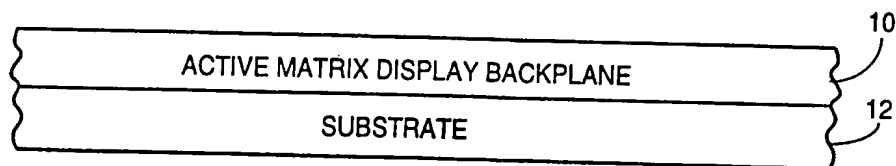


Fig. 1a
(Prior Art)

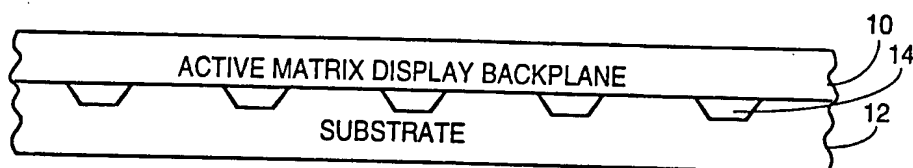


Fig. 1b
(Prior Art)

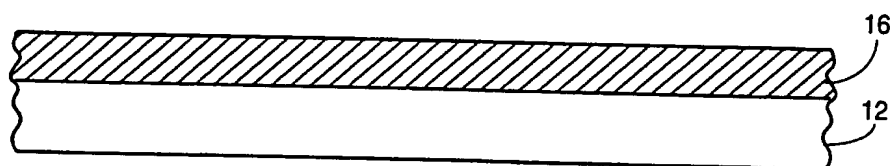


Fig. 1c
(Prior Art)

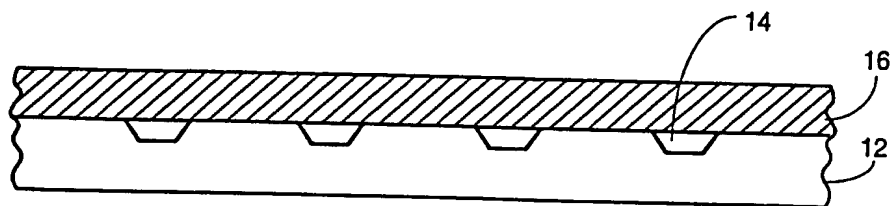


Fig. 1d
(Prior Art)

2/19

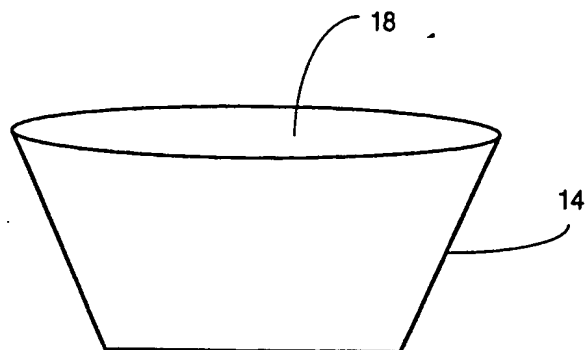


Fig. 2
(Prior Art)

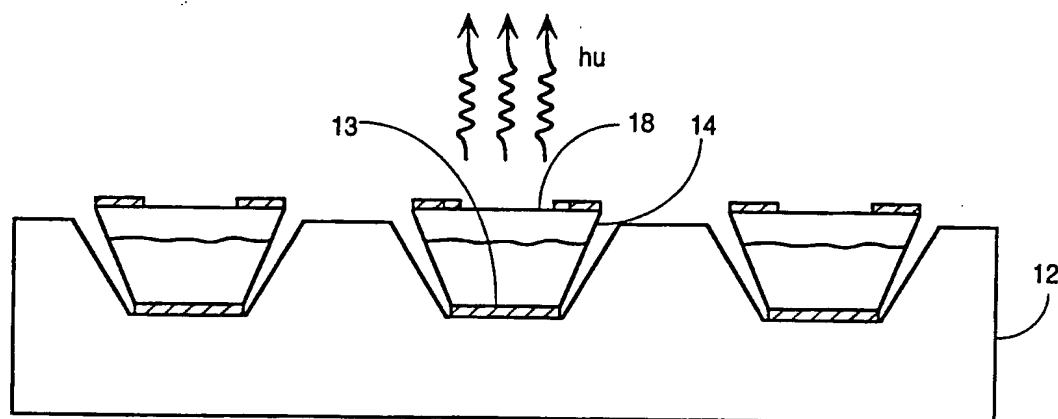


Fig. 3
(Prior Art)

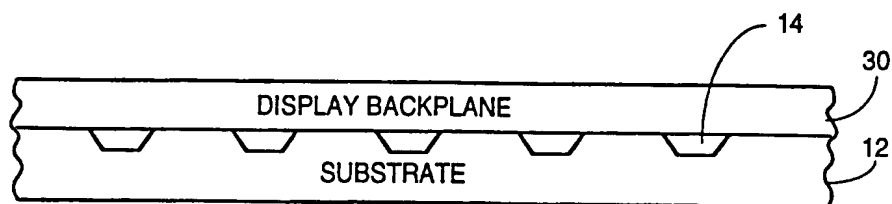
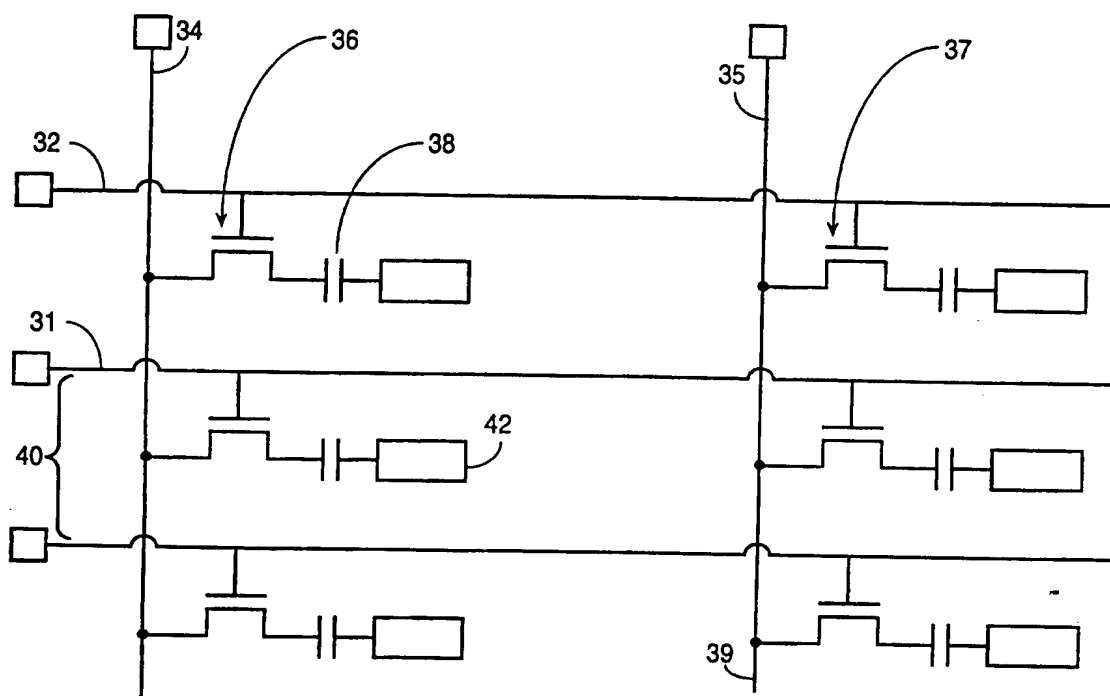
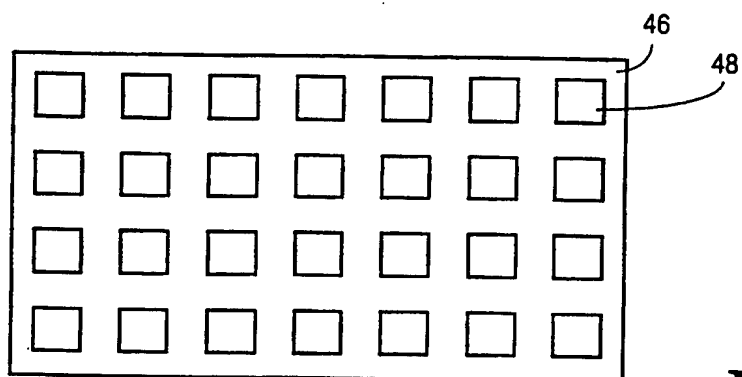


Fig. 4
(Prior Art)

3/19

**Fig. 5**
(Prior Art)**Fig. 6**
(Prior Art)

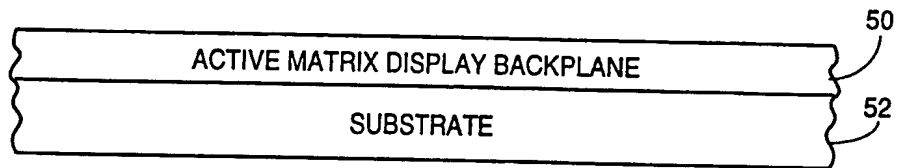


Fig. 7a

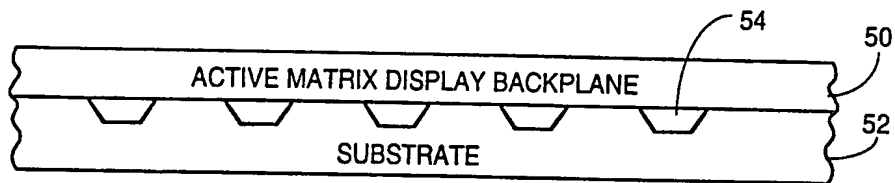


Fig. 7b

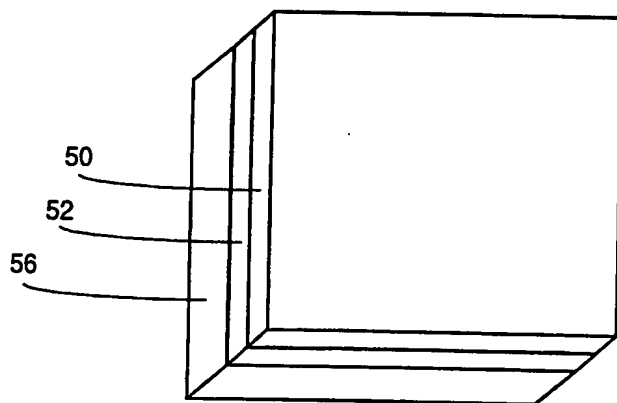


Fig. 7c

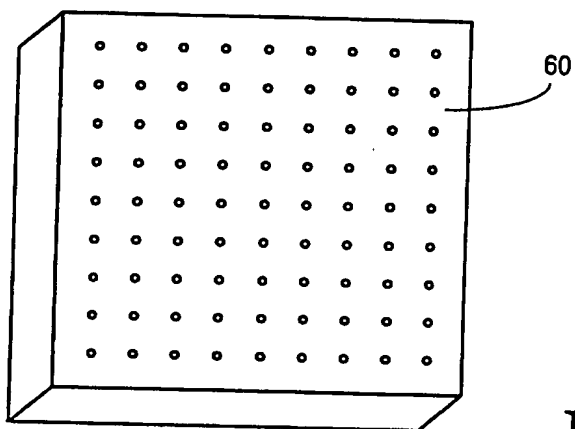


Fig. 8a

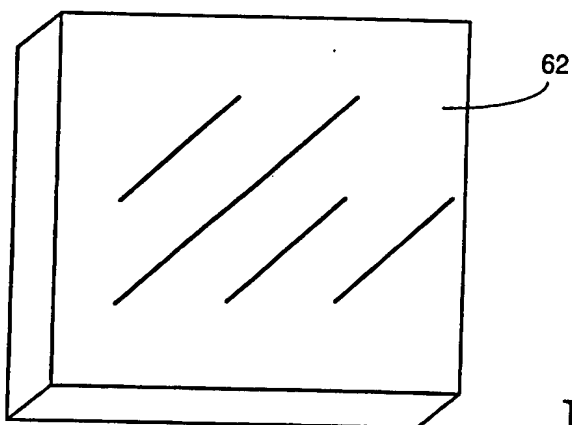


Fig. 8b

TOP LAYER

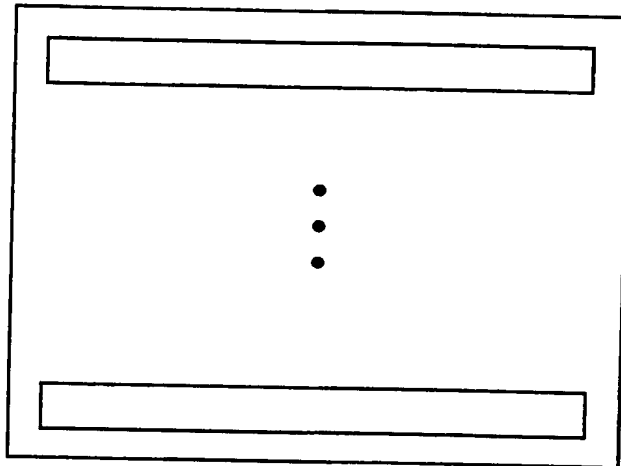


Fig. 8c

BOTTOM LAYER

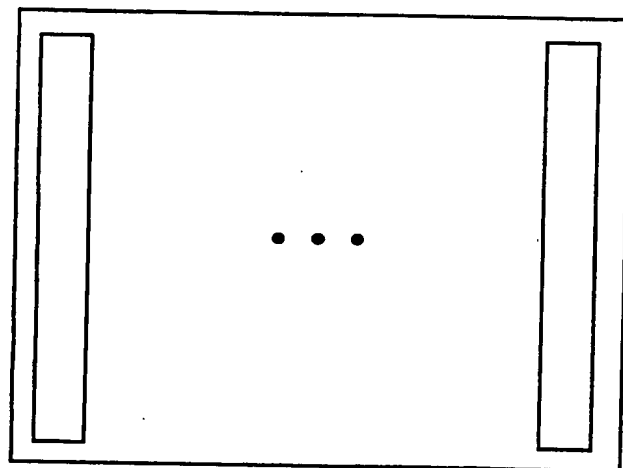
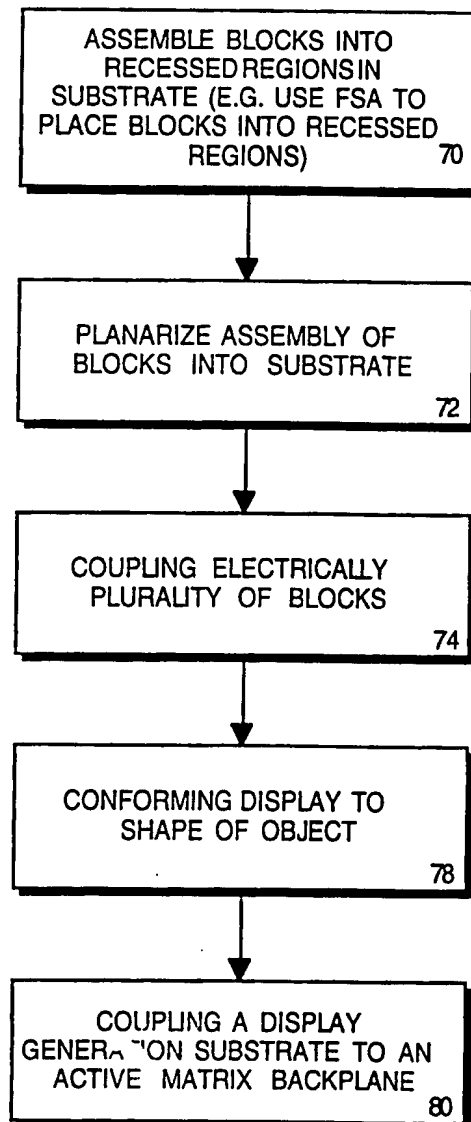
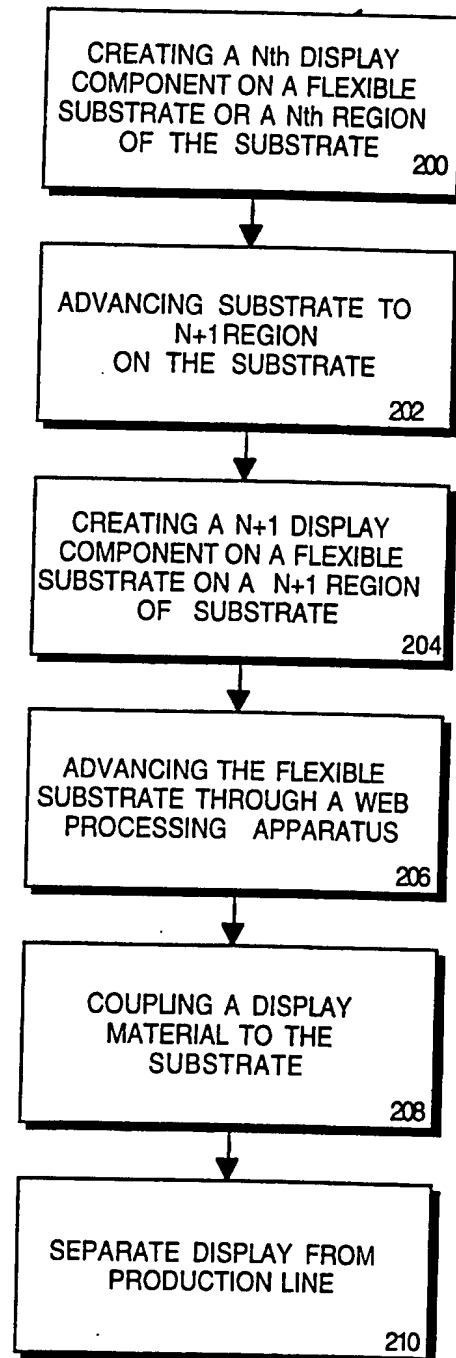


Fig. 8d

7/19

**Fig. 9**

8/19

**Fig. 10**

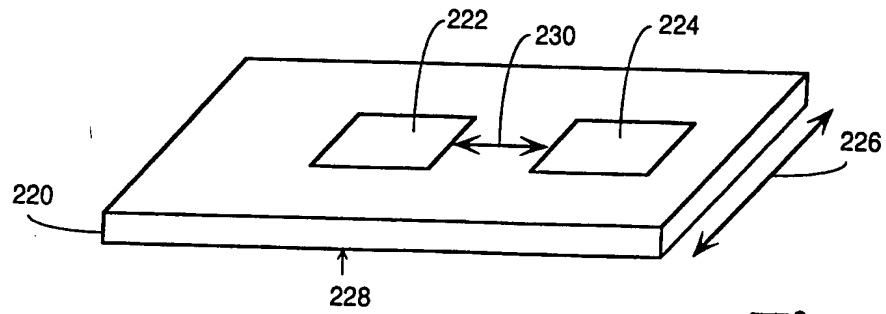


Fig. 11




Fig. 12a




Fig. 12b

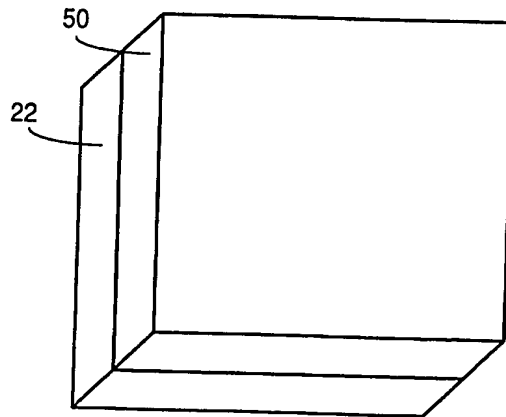


Fig. 13

10/19

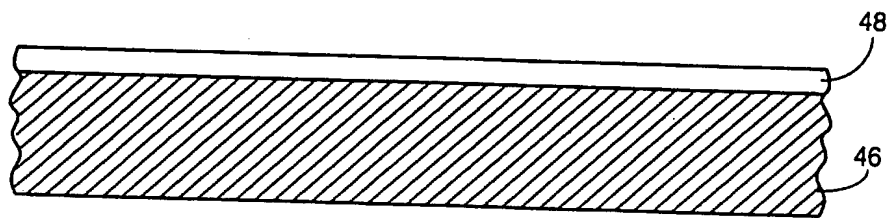


Fig. 14a

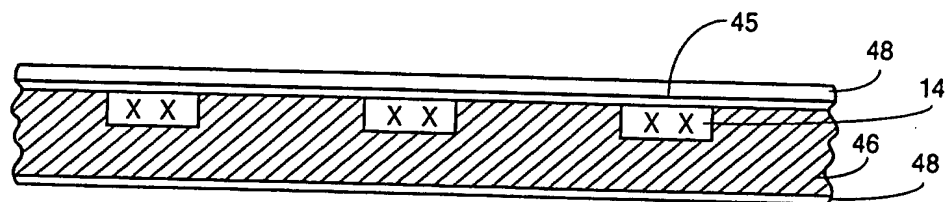


Fig. 14b

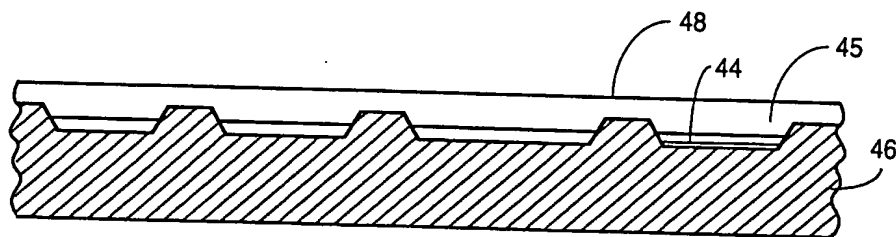
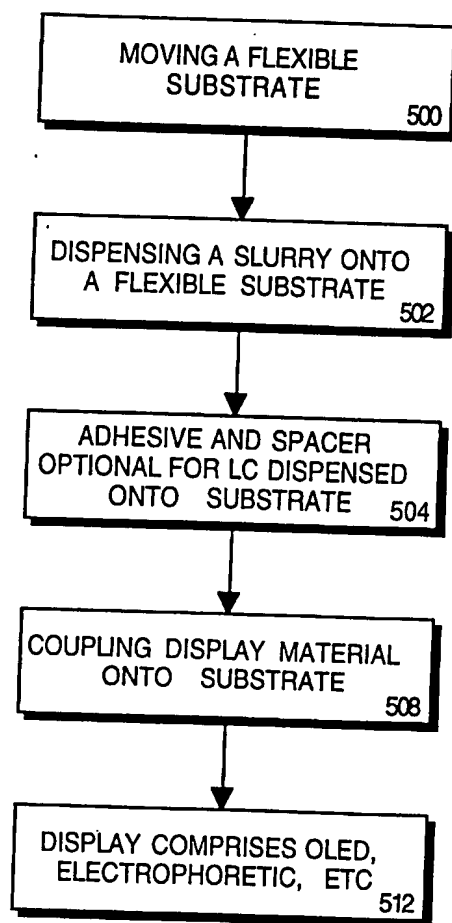


Fig. 14c

11/19

**Fig. 15a**

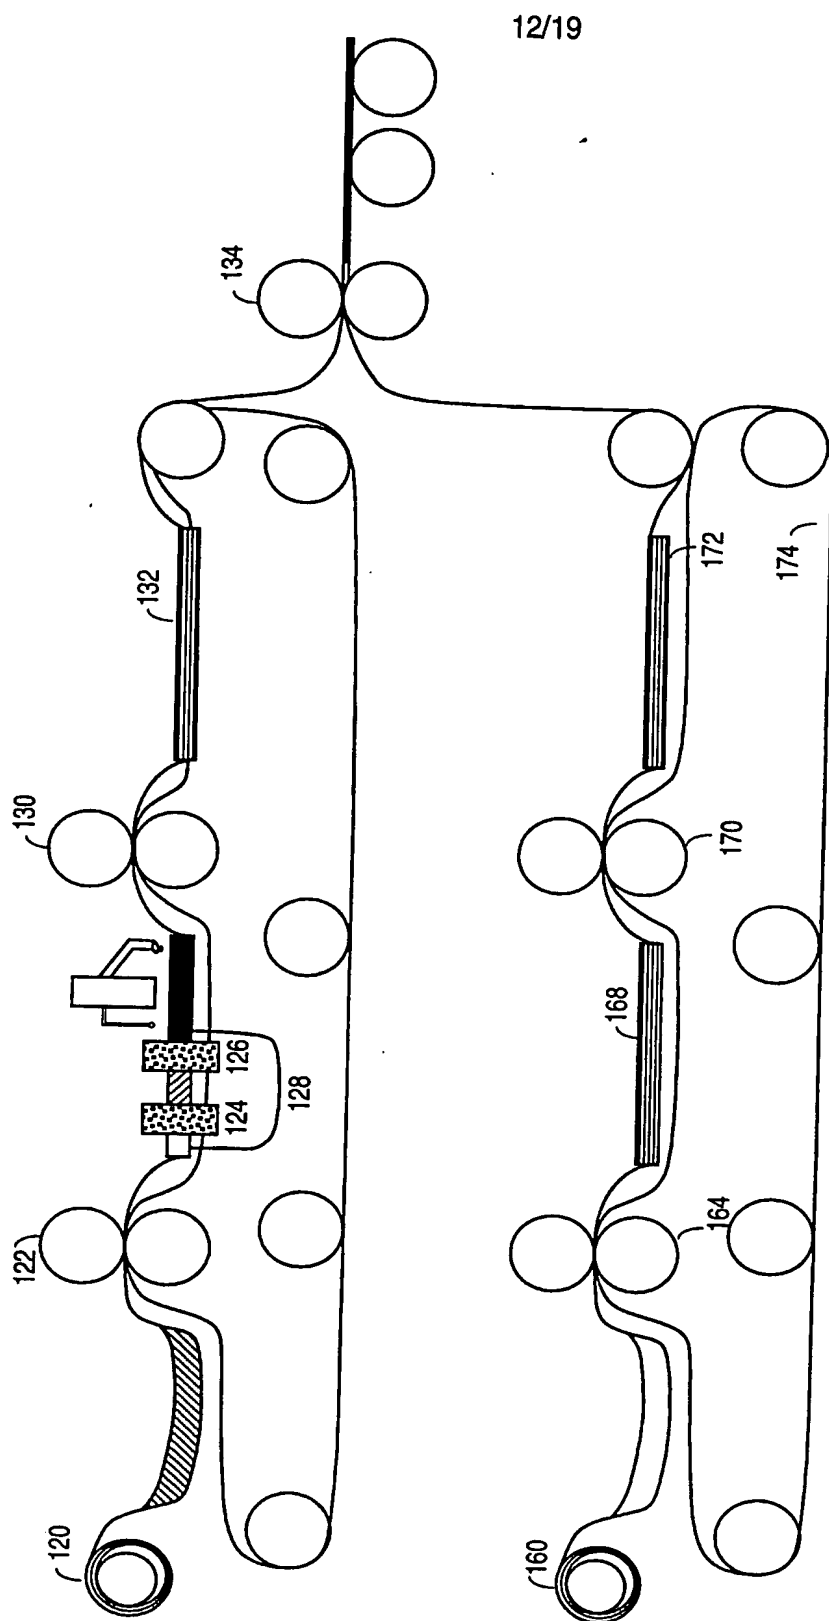
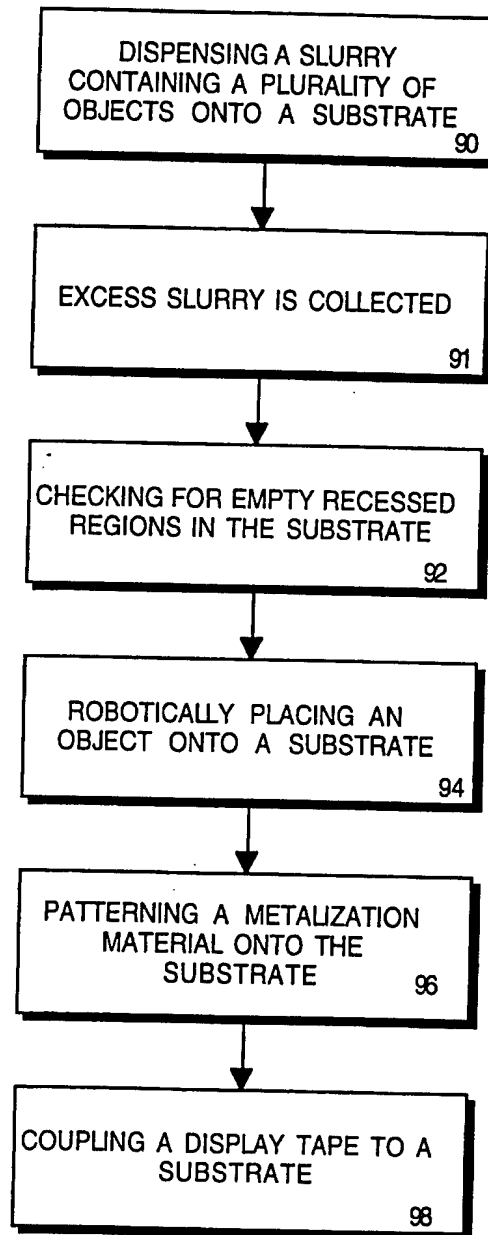
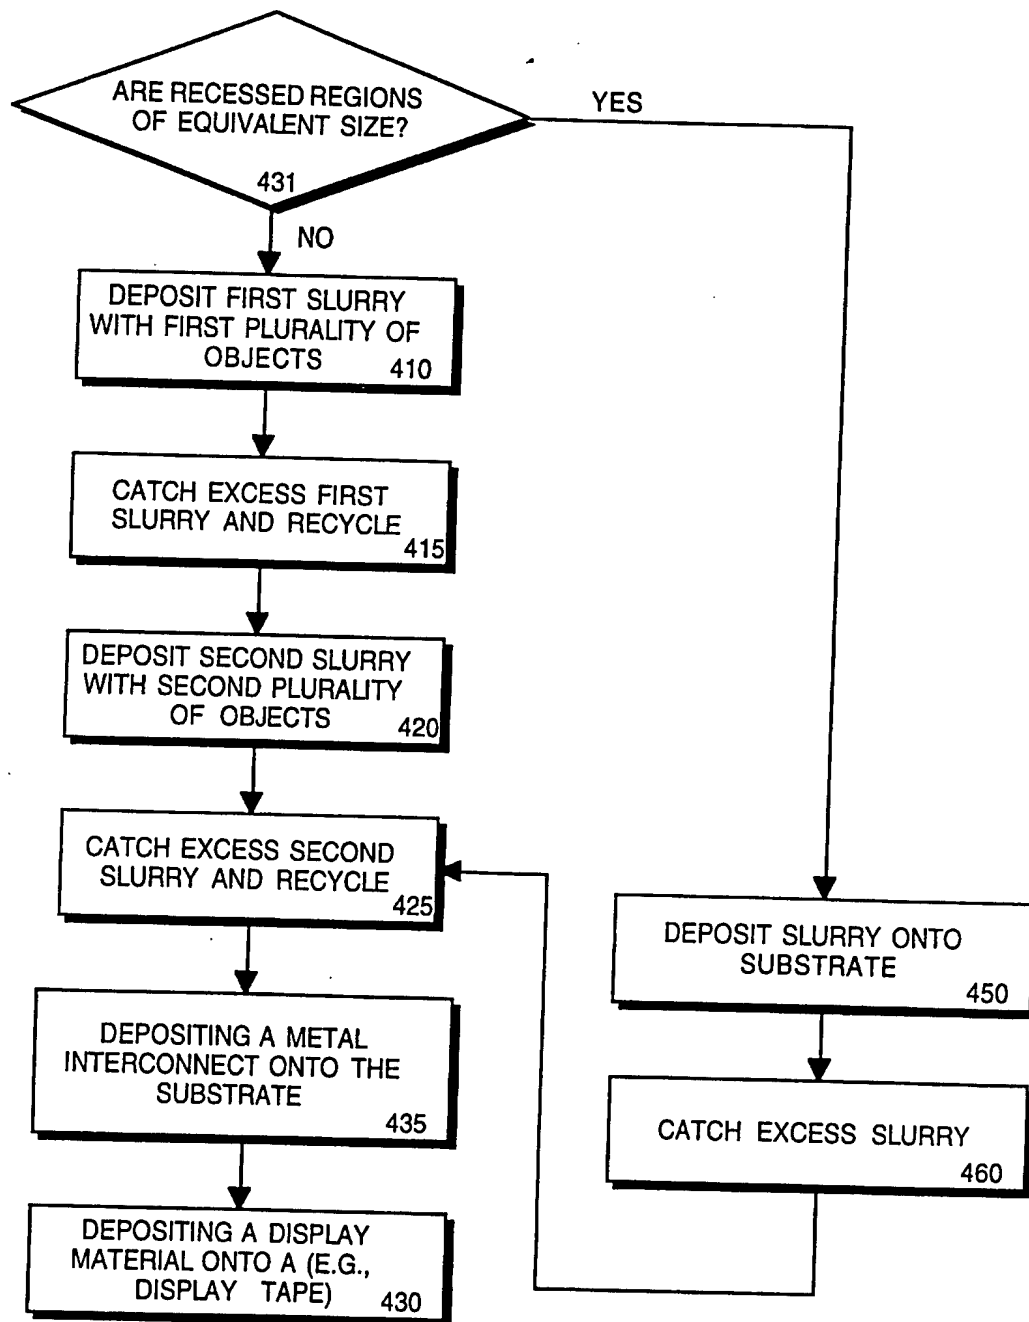


Fig. 15B

13/19

**Fig. 16**

14/19

**Fig. 17**

15/19

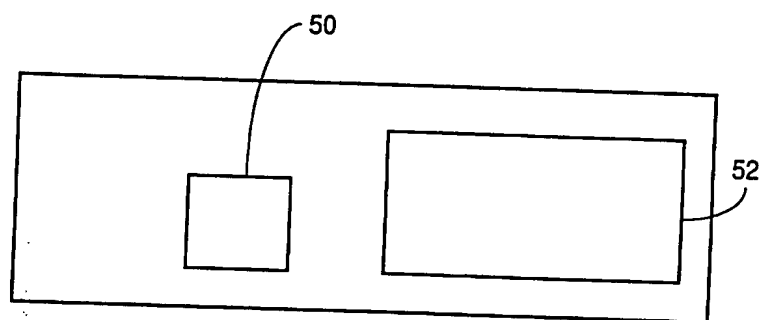


Fig. 18

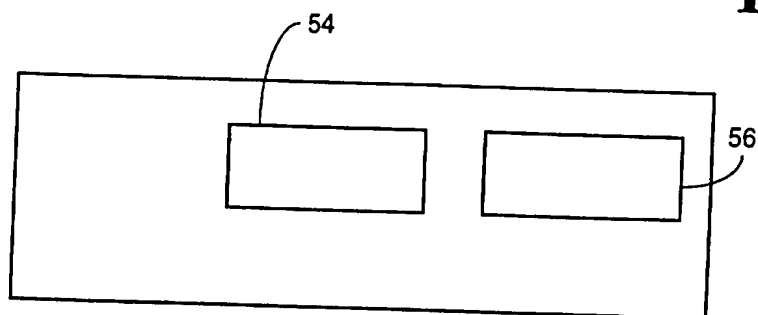


Fig. 19

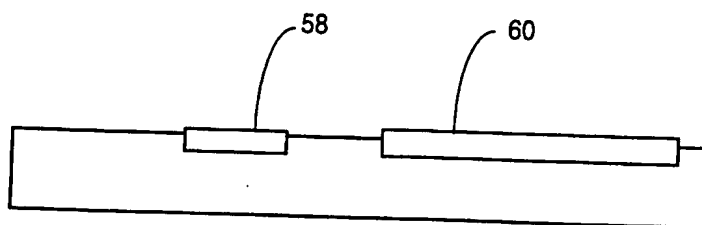


Fig. 20

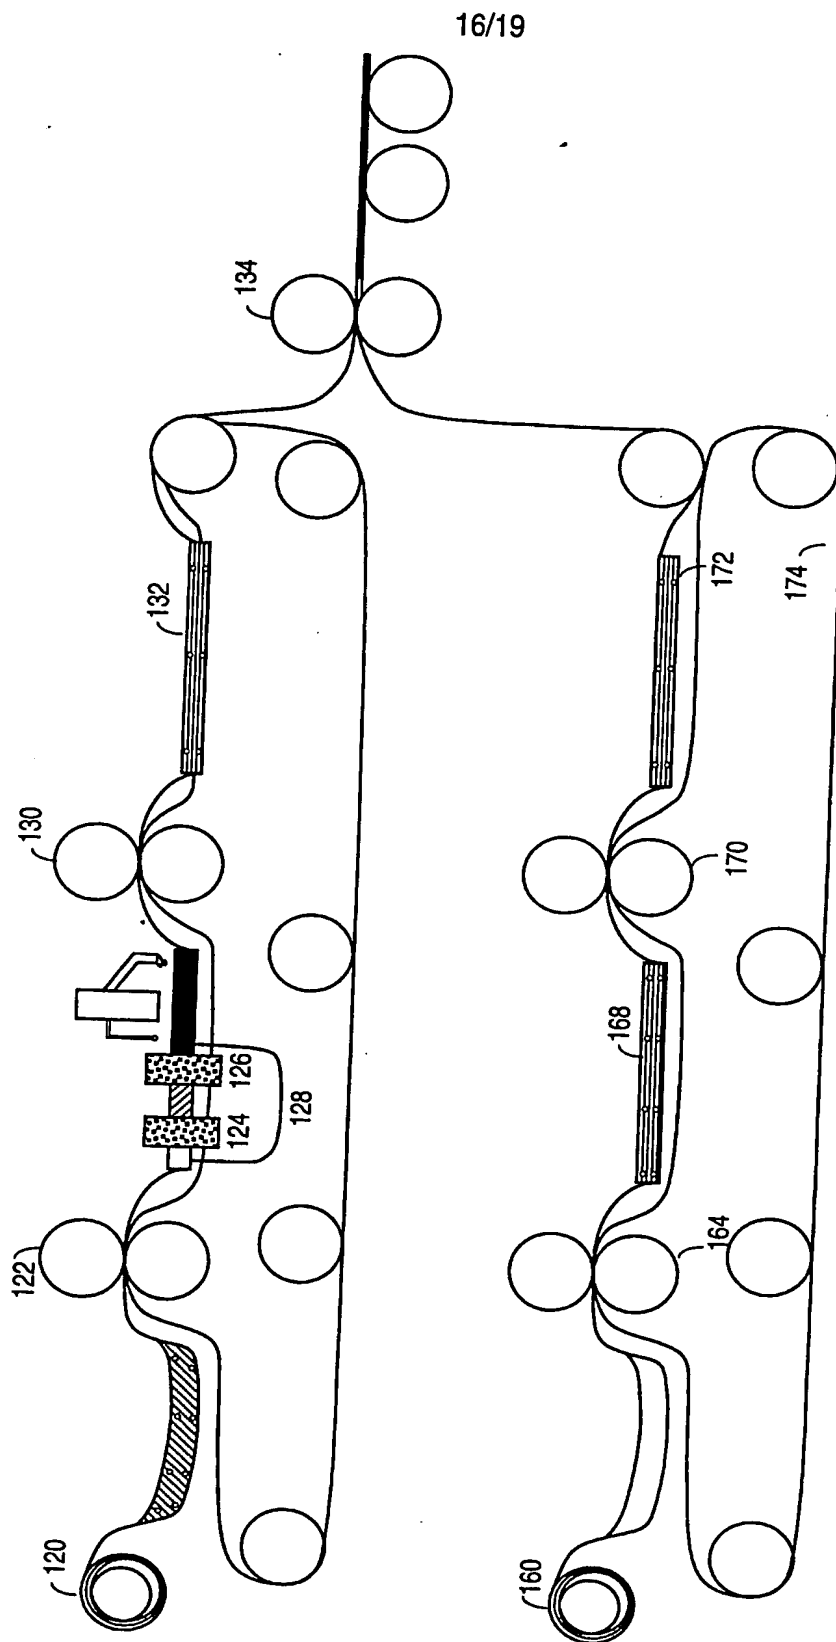


Fig. 21

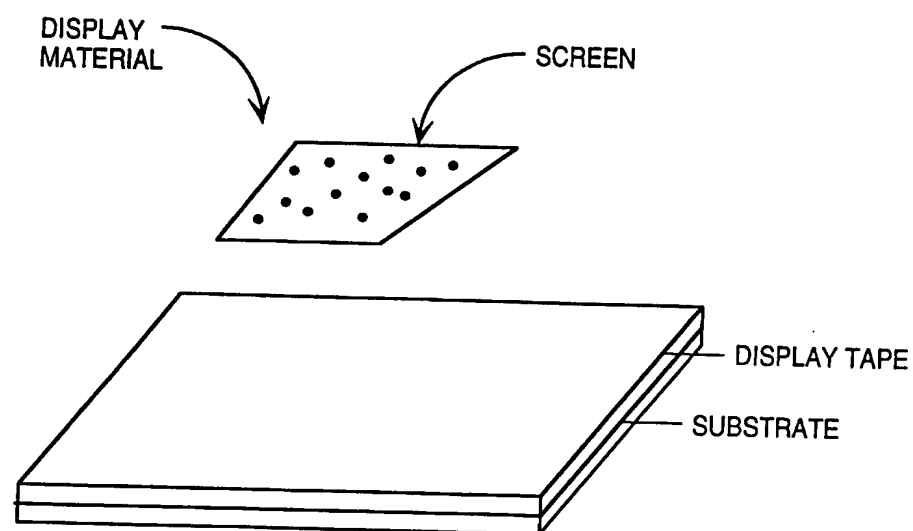


Fig. 22

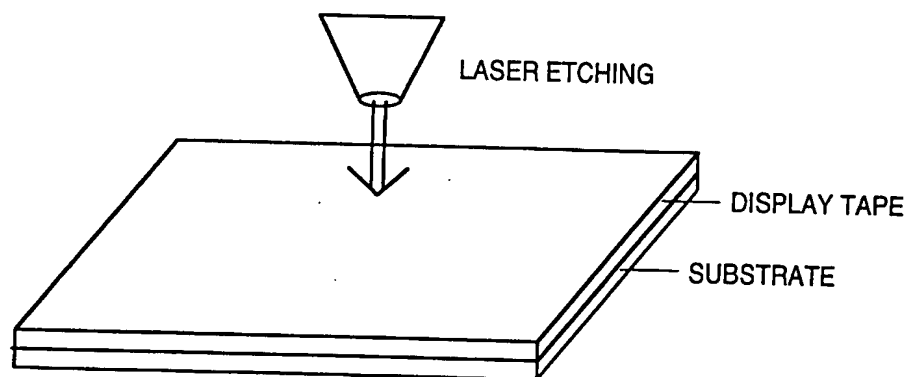


Fig. 23

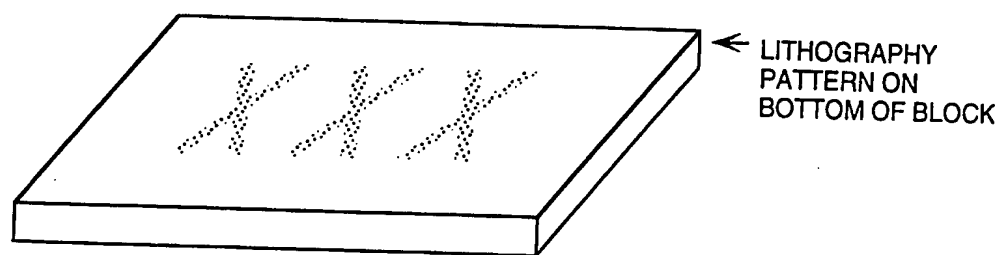


Fig. 24

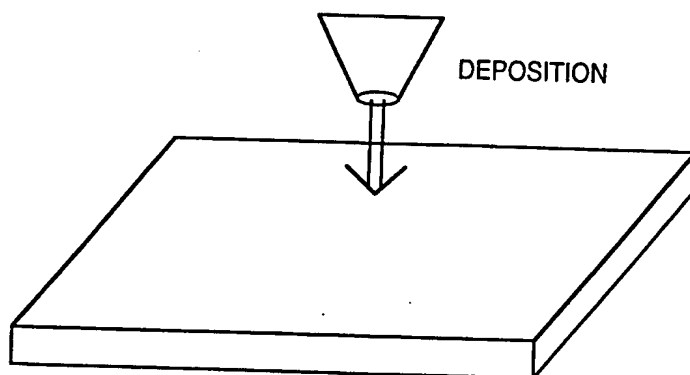


Fig. 25

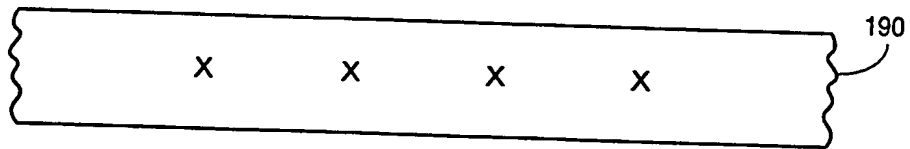


Fig. 26a

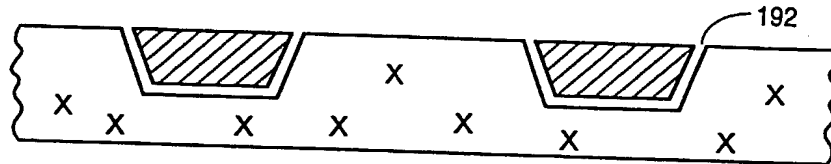


Fig. 26b

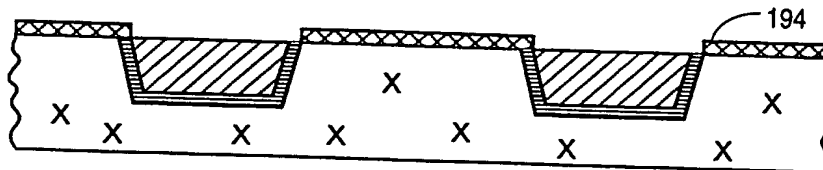


Fig. 26c

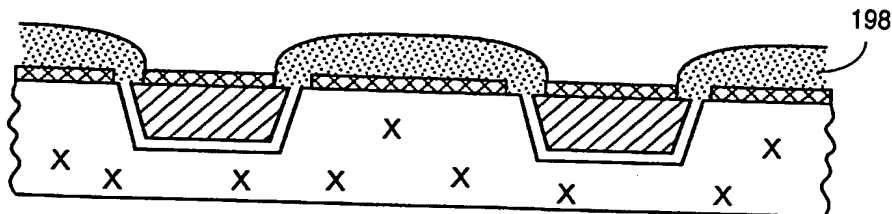


Fig. 26d

INTERNATIONAL SEARCH REPORT

Int'l. Patent Application No
PCT/US 99/30391

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01L27/00 H01L25/065 G02F1/167 G02F1/1362

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01L G02F

IPC 7 H01L G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages
------------	--

Relevant to claim No.

X EP 0 747 948 A (UNIV CALIFORNIA)
11 December 1996 (1996-12-11)

column 2, line 31-45
column 3, line 51 -column 4, line 13
column 13, line 28 -column 14, line 15
column 22, line 20-40

1, 2, 6-8,
10, 11,
13-15

23, 31,
43, 55,
63, 67,
75,
87-94,
97-99

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 May 2000

Date of mailing of the international search report

23/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Laere, A

INTERNATIONAL SEARCH REPORT

Inter. onal Application No
PCT/US 99/30391

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 545 291 A (YEH HSI-JEN J ET AL) 13 August 1996 (1996-08-13) cited in the application</p> <p>column 9, line 37-42 column 13, line 57-64</p>	<p>1,2,6-8, 10,11, 13-15, 23,31, 43,55, 63,67, 75, 87-94, 97-99</p>
A	<p>NAKAMURA E ET AL: "Development of electrophoretic display using microcapsulated suspension" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, US, SANTA ANA, CA: SID, vol. 29, 1998, pages 1014-1017-1017, XP002114866 ISSN: 0098-966X the whole document</p>	<p>1</p>
A	<p>WU C C ET AL: "INTEGRATION OF ORGANIC LED'S AND AMORPHOUS SI TFT'S ONTO FLEXIBLE AND LIGHTWEIGHT METAL FOIL SUBSTRATES" IEEE ELECTRON DEVICE LETTERS, US, IEEE INC. NEW YORK, vol. 18, no. 12, 1 December 1997 (1997-12-01), pages 609-612, XP000727114 ISSN: 0741-3106 the whole document</p>	<p>1</p>
E	<p>WO 99 67678 A (E INK CORP) 29 December 1999 (1999-12-29)</p> <p>page 1, line 1 -page 4, line 20 page 7, line 4-19 page 30, line 14 -page 32, line 18</p>	<p>1,2,6-8, 10,11, 13-15, 17,18, 55,56, 58-60</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Appl. Application No

PCT/US 99/30391

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0747948	A	11-12-1996	US 5824186 A	20-10-1998
			AU 2689999 A	01-07-1999
			AU 2690099 A	24-06-1999
			AU 708552 B	05-08-1999
			AU 5591796 A	19-12-1996
			CA 2177219 A	08-12-1996
			CN 1147153 A	09-04-1997
			JP 9120943 A	06-05-1997
US 5545291	A	13-08-1996	AU 681928 B	11-09-1997
			AU 1304695 A	03-07-1995
			CA 2177276 A	22-06-1995
			CN 1137329 A	04-12-1996
			EP 0734586 A	02-10-1996
			JP 9506742 T	30-06-1997
			WO 9517005 A	22-06-1995
			US 5783856 A	21-07-1998
			US 5904545 A	18-05-1999
			US 5824186 A	20-10-1998
WO 9967678	A	29-12-1999	AU 4703999 A	10-01-2000